


**Fiberglass  
Reinforced  
Polyester  
Thermoset  
Insulators**

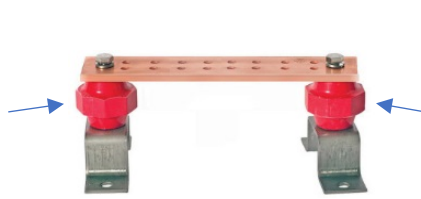

- Type 1**  
for Panel & Switchboards for indoor use up to 600 volts
- Type 2**  
Light Duty for indoor use up to 600 volts
- Type 3**  
Bus-Type Apparatus for indoor use up to 2500 volts
- Type 4**  
Center Post 4000 Series for indoor use up to 1500 volts
- Type 5**  
Center Post 5000 Series for indoor use up to 5000 volts
- Type 6**  
5 to 15 kV Standoff Insulator

Part #	Glasic Part #	Indoor Voltage	Shape	Diameter	Height	Insert Diameter	Insert Depth	Insert Type	Part Type
1100-A1	2165-1A	600	Hex	1	1	1/4	5/16	Aluminum	Type 1
1100-A1/M6*	2165-3A	600	Hex	25mm	25mm	M6 x 1.0	11.1mm	Aluminum	Type 1
1125-A1	2165-1B	600	Hex	1	1-1/4	1/4-20	5/16	Aluminum	Type 1
R2137-A4	1603-2A	600	Round	1-3/4	1-3/8	3/8-16	3/8	Aluminum	Type 2R
3213-A5	1461-1A	2500	Round	2-1/2	2-1/8	3/8-16	9/16	Aluminum	Type 3
3213-A6	1461-1B	2500	Round	2-1/2	2-1/8	1/2-13	5/8	Aluminum	Type 3
3213-S8	1461-1C	2500	Round	2-1/2	2-1/8	5/8-11	3/4	Steel	Type 3
R4150-A3	2015-2A	1500	Round	1-3/4	1-1/2	5/16-18	3/8	Aluminum	Type 4R
R4150-A4	2015-3A	1500	Round	1-3/4	1-1/2	3/8-16	3/8	Aluminum	Type 4R
UV4150-A4**	2015-3A	1500	Octagon	2	1-1/2	3/8-16	3/8	Aluminum	Type 4
4150-A4	2015-3A	1500	Octagon	2	1-1/2	3/8-16	3/8	Aluminum	Type 4
R4150-A4 MB5500***	2015-3A	1500	Round	1-3/4	1-1/2	3/8-16	3/8	Aluminum	Type 4R
4150-S2	2015-1A	1500	Octagon	2	1-1/2	1/4-20	7/16	Steel	Type 4
4150-S4	2015-3A	1500	Octagon	2	1-1/2	3/8-16	3/8	Steel	Type 4
R4175-A3	2015-2B	2000	Round	1-3/4	1-3/4	5/16-18	3/8	Aluminum	Type 4R
R4175-A4	2015-3B	2000	Round	1-3/4	1-3/4	3/8-16	3/8	Aluminum	Type 4R
R4200-A3	2015-2C	2500	Round	1-3/4	2	5/16-18	3/8	Aluminum	Type 4R
R4200-A5	2015-3C	2500	Round	1-3/4	2	3/8-16	9/16	Aluminum	Type 4R
4200-A5-M10*		2500	Octagon	2	2	M10x1.50	14.2mm	Aluminum	Type 4
R4200-A5UV	2015-3C	2500	Round	1-3/4	2	3/8-16	9/16	Aluminum	Type 4R
4200-S5	2015-3C	2500	Octagon	2	2	3/8-16	9/16	Steel	Type 4
4200-S5/M10*		2500	Octagon	2	2	M10x1.50	14.2mm	Steel	Type 4
4200-A3	2015-2C	2500	Octagon	2	2	5/16-18	3/8	Aluminum	Type 4
4200-A5	2015-3C	2500	Octagon	2	2	3/8-16	9/16	Aluminum	Type 4
4200-A5-BLACK	2015-3C	2500	Octagon	2	2	3/8-16	9/16	Aluminum	Type 4
4200-A6	2015-4C	2500	Octagon	2	2	1/2-13	5/8	Aluminum	Type 4
4200-S3	2015-2C	2500	Octagon	2	2	5/16-18	3/8	Steel	Type 4
R4200-S5	2015-3C	2500	Round	1-3/4	2	3/8-16	9/16	Steel	Type 4R
4200-S6	2015-4C	2500	Octagon	2	2	1/2-13	5/8	Steel	Type 4
4225-A5	2015-3D	2700	Octagon	2	2-1/4	3/8-16	9/16	Aluminum	Type 4
4225-A6	2015-4D	2700	Octagon	2	2-1/4	1/2-13	5/8	Aluminum	Type 4
4225-S5	2015-3D	2700	Octagon	2	2-1/4	3/8-16	9/16	Steel	Type 4
4225-S6	2015-4D	2700	Octagon	2	2-1/4	1/2-13	5/8	Steel	Type 4
5250-A5	1872-1A	3200	Octagon	2-1/2	2-1/2	3/8-16	9/16	Aluminum	Type 5
5250-A6	1872-2A	3200	Octagon	2-1/2	2-1/2	1/2-13	5/8	Aluminum	Type 5
5263-A8	1872-3F	3400	Octagon	2-1/2	2-5/8	5/8-11	3/4	Aluminum	Type 5
5263-S8	1872-3F	3400	Octagon	2-1/2	2-5/8	5/8-11	3/4	Steel	Type 5
5275-A5	1872-1B	3600	Octagon	2-1/2	2-3/4	3/8-16	9/16	Aluminum	Type 5
5275-A6	1872-2B	3600	Octagon	2-1/2	2-3/4	1/2-13	5/8	Aluminum	Type 5
5300-A5	1872-1C	4100	Octagon	2-1/2	3	3/8-16	9/16	Aluminum	Type 5
5300-A6	1872-2C	4100	Octagon	2-1/2	3	1/2-13	5/8	Aluminum	Type 5
5325-A5	1872-1D	4500	Octagon	2-1/2	3-1/4	3/8-16	9/16	Aluminum	Type 5
5350-A5	1872-1E	5000	Octagon	2-1/2	3-1/2	3/8-16	9/16	Aluminum	Type 5
5350-A6	1872-2E	5000	Octagon	2-1/2	3-1/2	1/2-13	5/8	Aluminum	Type 5
6350-S10	1642-10E	5000	Round	3-3/4	3-1/2	3/8-16	5/8	Steel	Type 6
6350-S10 4X4	1642-10E	5000	Round	3-3/4	3-1/2	3/8-16	5/8	Steel	Type 6
6500-S10	N/A	7500	Round	2-3/4	5	3/8-16	5/8	Steel	Type 3L
6600-S10	2450-11	15000	Round	3-3/4	6	3/8-16	5/8	Steel	Type 6
6600-S10 4X4 RED	2450-11	15000	Round	3-3/4	6	3/8-16	5/8	Steel	Type 6

\*M = Metric (millimeters)

\*\*UV = Ultra-Violet Protective Coating

\*\*\*High Temperature - Up to 170°C