



# STORM™

POWER COMPONENTS

1-800-394-4804

BD Series


## FLEXBRAID SPECIFICATIONS and PRICING

(Please see illustration below for reference)

|               |              | Pad Dimensions |            |             | Hole Diameter and Spacing |           |           |           |
|---------------|--------------|----------------|------------|-------------|---------------------------|-----------|-----------|-----------|
| Part Number   | LL<br>Length | W<br>Width     | T<br>Thick | D<br>Length | E<br>Spacing              | K<br>Dia. | G<br>Edge | Price     |
| Single Braid: |              |                |            |             |                           |           |           |           |
| 190 AMP       |              |                |            |             |                           |           |           |           |
| SC-BD12       | 12           | 1.190          | 0.130      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 72.62  |
| SC-BD12N      | 12           | 1.190          | 0.130      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 72.62  |
| SC-BD18       | 18           | 1.190          | 0.130      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 79.82  |
| SC-BD18N      | 18           | 1.190          | 0.130      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 79.82  |
| SC-BD24       | 24           | 1.190          | 0.130      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 87.01  |
| SC-BD24N      | 24           | 1.190          | 0.130      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 87.01  |
| SC-BD36       | 36           | 1.190          | 0.130      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 101.41 |
| SC-BD36N      | 36           | 1.190          | 0.130      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 101.41 |
| SC-BD48       | 48           | 1.190          | 0.130      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 115.82 |
| SC-BD48N      | 48           | 1.190          | 0.130      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 115.82 |
| Two Braids:   |              |                |            |             |                           |           |           |           |
| 380 AMP       |              |                |            |             |                           |           |           |           |
| SC-B2D12      | 12           | 1.190          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 93.56  |
| SC-B2D12N     | 12           | 1.190          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 93.56  |
| SC-B2D18      | 18           | 1.190          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 107.97 |
| SC-B2D18N     | 18           | 1.190          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 107.97 |
| SC-B2D24      | 24           | 1.190          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 122.37 |
| SC-B2D24N     | 24           | 1.190          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 122.37 |
| SC-B2D36      | 36           | 1.190          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 151.18 |
| SC-B2D36N     | 36           | 1.190          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 151.18 |
| SC-B2D48      | 48           | 1.190          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.620     | \$ 179.97 |
| SC-B2D48N     | 48           | 1.190          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 179.97 |
| Three Braids: |              |                |            |             |                           |           |           |           |
| 470 AMP       |              |                |            |             |                           |           |           |           |
| SC-B3D12      | 12           | 1.190          | 0.270      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 111.57 |
| SBCB3D12N     | 12           | 1.190          | 0.270      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 111.57 |
| SC-B3D18      | 18           | 1.190          | 0.270      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 133.17 |
| SC-B3D18N     | 18           | 1.190          | 0.270      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 133.17 |
| SC-B3D24      | 24           | 1.190          | 0.270      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 154.78 |
| SC-B3D24N     | 24           | 1.190          | 0.270      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 154.78 |
| SC-B3D36      | 36           | 1.190          | 0.270      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 197.98 |
| SC-B3D36N     | 36           | 1.190          | 0.270      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 197.98 |
| SC-B3D48      | 48           | 1.190          | 0.270      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 241.19 |
| SC-B3D48N     | 48           | 1.190          | 0.270      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 241.19 |
| Four Braids:  |              |                |            |             |                           |           |           |           |
| 600 AMP       |              |                |            |             |                           |           |           |           |
| SC-B4D12      | 12           | 1.190          | 0.390      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 130.69 |
| SC-B4D12N     | 12           | 1.190          | 0.390      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 130.69 |
| SC-B4D18      | 18           | 1.190          | 0.390      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 159.50 |
| SC-B4D18N     | 18           | 1.190          | 0.390      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 159.50 |
| SC-B4D24      | 24           | 1.190          | 0.390      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 188.31 |
| SC-B4D24N     | 24           | 1.190          | 0.390      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 188.31 |
| SC-B4D36      | 36           | 1.190          | 0.390      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 245.91 |

|           |    |       |       |      |       |       |       |           |
|-----------|----|-------|-------|------|-------|-------|-------|-----------|
| SC-B4D36N | 36 | 1.190 | 0.390 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 245.91 |
| SC-B4D48  | 48 | 1.190 | 0.390 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 303.52 |
| SC-B4D48N | 48 | 1.190 | 0.390 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 303.52 |

AMP RATING WILL VARY WITH AMBIENT CONDITIONS, ORIENTATION OF THE BRAID  
AND OTHER SERVICE CONDITIONS.  
ALL SIZES ARE LISTED TO UL 467 GROUNDING AND BONDING EQUIPMENT STANDARDS

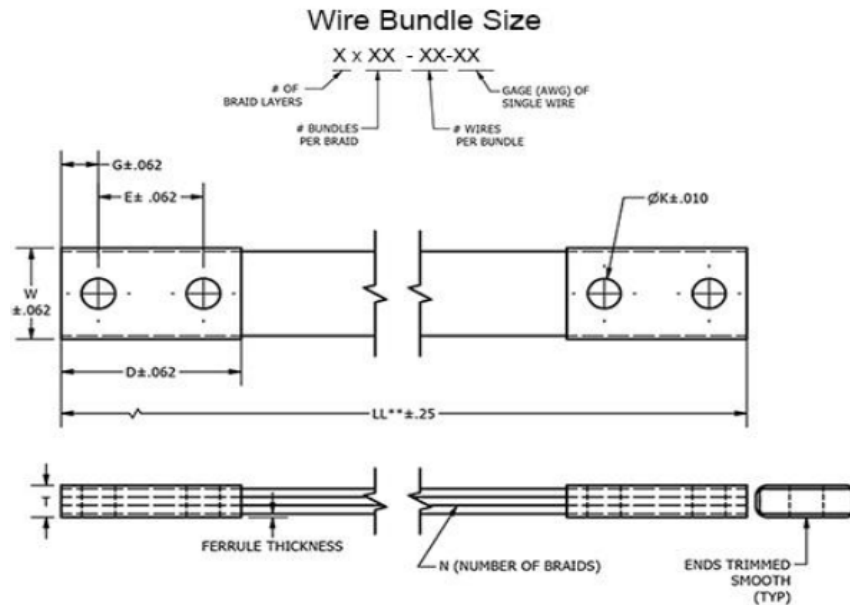

1-800-394-4804

BE Series

## FLEXBRAID SPECIFICATIONS and PRICING

(Please see illustration below for reference)


|               |              | Pad Dimensions |            |             | Hole Diameter and Spacing |           |           |           |
|---------------|--------------|----------------|------------|-------------|---------------------------|-----------|-----------|-----------|
| Part Number   | LL<br>Length | W<br>Width     | T<br>Thick | D<br>Length | E<br>Spacing              | K<br>Dia. | G<br>Edge | Price     |
| Single Braid: |              |                |            |             |                           |           |           |           |
| 340 AMP       |              |                |            |             |                           |           |           |           |
| SC-BE12       | 12           | 1.250          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 87.41  |
| SC-BE12N      | 12           | 1.250          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 87.41  |
| SC-BE18       | 18           | 1.250          | 0.210      | 2.00        | 1.000                     | 0.410     | 0.750     | \$ 99.36  |
| SC-BE18N      | 18           | 1.250          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 99.36  |
| SC-BE24       | 24           | 1.250          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 111.29 |
| SC-BE24N      | 24           | 1.250          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 111.29 |
| SC-BE36       | 36           | 1.250          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 135.19 |
| SC-BE36N      | 36           | 1.250          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 135.19 |
| SC-BE48       | 48           | 1.250          | 0.210      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 159.07 |
| SC-BE48N      | 48           | 1.250          | 0.210      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 159.07 |
| Two Braids:   |              |                |            |             |                           |           |           |           |
| 530 AMP       |              |                |            |             |                           |           |           |           |
| SC-B2E12      | 12           | 1.250          | 0.350      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 118.39 |
| SC-B2E12N     | 12           | 1.250          | 0.350      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 118.39 |
| SC-B2E18      | 18           | 1.250          | 0.350      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 142.27 |
| SC-B2E18N     | 18           | 1.250          | 0.350      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 142.27 |

|                      |    |       |       |      |       |       |       |           |
|----------------------|----|-------|-------|------|-------|-------|-------|-----------|
| SC-B2E24             | 24 | 1.250 | 0.350 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 166.15 |
| SC-B2E24N            | 24 | 1.250 | 0.350 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 166.15 |
| SC-B2E36             | 36 | 1.250 | 0.350 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 213.93 |
| SC-B2E36N            | 36 | 1.250 | 0.350 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 213.93 |
| SC-B2E48             | 48 | 1.250 | 0.350 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 261.69 |
| SC-B2E48N            | 48 | 1.250 | 0.350 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 261.69 |
| <b>Three Braids:</b> |    |       |       |      |       |       |       |           |
| <b>700 AMP</b>       |    |       |       |      |       |       |       |           |
| SC-B3E12             | 12 | 1.250 | 0.580 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 168.04 |
| SC-B3E12N            | 12 | 1.250 | 0.580 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 170.99 |
| SC-B3E18             | 18 | 1.250 | 0.580 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 203.87 |
| SC-B3E18N            | 18 | 1.250 | 0.580 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 206.82 |
| SC-B3E24             | 24 | 1.250 | 0.580 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 239.69 |
| SC-B3E24N            | 24 | 1.250 | 0.580 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 242.65 |
| SC-B3E36             | 36 | 1.250 | 0.580 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 311.35 |
| SC-B3E36N            | 36 | 1.250 | 0.580 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 314.29 |
| SC-B3E48             | 48 | 1.250 | 0.580 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 383.01 |
| SC-B3E48N            | 48 | 1.250 | 0.580 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 385.94 |
| <b>Four Braids:</b>  |    |       |       |      |       |       |       |           |
| <b>875 AMP</b>       |    |       |       |      |       |       |       |           |
| SC-B4E12             | 12 | 1.250 | 0.800 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 198.00 |
| SC-B4E12N            | 12 | 1.250 | 0.800 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 200.95 |
| SC-B4E18             | 18 | 1.250 | 0.800 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 245.78 |
| SC-B4E18N            | 18 | 1.250 | 0.800 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 248.72 |
| SC-B4E24             | 24 | 1.250 | 0.800 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 293.54 |
| SC-B4E24N            | 24 | 1.250 | 0.800 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 296.49 |
| SC-B4E36             | 36 | 1.250 | 0.800 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 389.08 |
| SC-B4E36N            | 36 | 1.250 | 0.800 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 392.03 |
| SC-B4E48             | 48 | 1.250 | 0.800 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 484.63 |
| SC-B4E48N            | 48 | 1.250 | 0.800 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 487.57 |

AMP RATING WILL VARY WITH AMBIENT CONDITIONS, ORIENTATION OF THE BRAID  
AND OTHER SERVICE CONDITIONS.  
ALL SIZES ARE LISTED TO UL 467 GROUNDING AND BONDING EQUIPMENT STANDARDS



### Wire Bundle Size

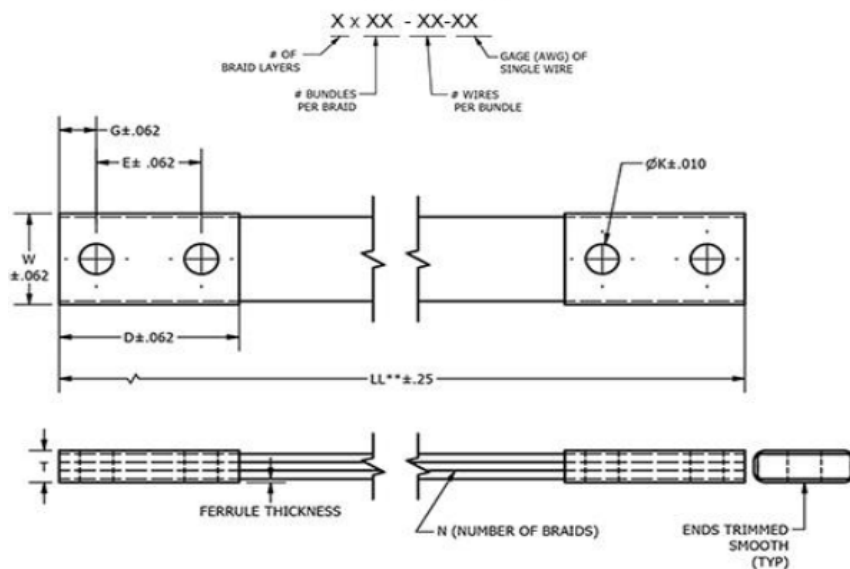



# STORM™

POWER COMPONENTS

1-800-394-4804

BF Series


## FLEXBRAID SPECIFICATIONS and PRICING

(Please see illustration below for reference)

|               |              | Pad Dimensions |            |             | Hole Diameter and Spacing |           |           |           |
|---------------|--------------|----------------|------------|-------------|---------------------------|-----------|-----------|-----------|
| Part Number   | LL<br>Length | W<br>Width     | T<br>Thick | D<br>Length | E<br>Spacing              | K<br>Dia. | G<br>Edge | Price     |
| Single Braid: |              |                |            |             |                           |           |           |           |
| 375 AMP       |              |                |            |             |                           |           |           |           |
| SC-BF12       | 12           | 1.380          | 0.280      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 93.13  |
| SC-BF12N      | 12           | 1.380          | 0.280      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 93.13  |
| SC-BF18       | 18           | 1.380          | 0.280      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 107.30 |
| SC-BF18N      | 18           | 1.380          | 0.280      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 107.30 |
| SC-BF24       | 24           | 1.380          | 0.280      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 121.49 |
| SC-BF24N      | 24           | 1.380          | 0.280      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 121.49 |
| SC-BF36       | 36           | 1.380          | 0.280      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 149.84 |
| SC-BF36N      | 36           | 1.380          | 0.280      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 149.84 |
| SC-BF48       | 48           | 1.380          | 0.280      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 178.19 |
| SC-BF48N      | 48           | 1.380          | 0.280      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 178.19 |
| Two Braids:   |              |                |            |             |                           |           |           |           |
| 600 AMP       |              |                |            |             |                           |           |           |           |
| SC-B2F12      | 12           | 1.380          | 0.350      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 129.56 |
| SC-B2F12N     | 12           | 1.380          | 0.380      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 129.56 |
| SC-B2F18      | 18           | 1.380          | 0.350      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 157.91 |
| SC-B2F18N     | 18           | 1.380          | 0.380      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 157.91 |
| SC-B2F24      | 24           | 1.380          | 0.350      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 186.26 |
| SC-B2F24N     | 24           | 1.380          | 0.380      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 186.26 |
| SC-B2F36      | 36           | 1.380          | 0.350      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 242.97 |
| SC-B2F36N     | 36           | 1.380          | 0.380      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 242.97 |
| SC-B2F48      | 48           | 1.380          | 0.350      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 299.66 |
| SC-B2F48N     | 48           | 1.380          | 0.380      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 299.66 |
| Three Braids: |              |                |            |             |                           |           |           |           |
| 900 AMP       |              |                |            |             |                           |           |           |           |
| SC-B3F12      | 12           | 1.380          | 0.590      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 178.22 |
| SC-B3F12N     | 12           | 1.380          | 0.590      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 181.17 |
| SC-B3F18      | 18           | 1.380          | 0.590      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 220.74 |
| SC-B3F18N     | 18           | 1.380          | 0.590      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 223.69 |
| SC-B3F24      | 24           | 1.380          | 0.590      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 263.28 |
| SC-B3F24N     | 24           | 1.380          | 0.590      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 266.21 |
| SC-B3F36      | 36           | 1.380          | 0.590      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 348.32 |
| SC-B3F36N     | 36           | 1.380          | 0.590      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 351.27 |
| SC-B3F48      | 48           | 1.380          | 0.590      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 433.38 |
| SC-B3F48N     | 48           | 1.380          | 0.590      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 436.33 |
| Four Braids:  |              |                |            |             |                           |           |           |           |
| 1000 AMP      |              |                |            |             |                           |           |           |           |
| SC-B4F12      | 12           | 1.380          | 0.870      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 218.01 |
| SC-B4F12N     | 12           | 1.380          | 0.870      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 220.96 |
| SC-B4F18      | 18           | 1.380          | 0.870      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 274.72 |
| SC-B4F18N     | 18           | 1.380          | 0.870      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 277.67 |
| SC-B4F24      | 24           | 1.380          | 0.870      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 331.42 |
| SC-B4F24N     | 24           | 1.380          | 0.870      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 334.37 |
| SC-B4F36      | 36           | 1.380          | 0.870      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 444.83 |

|           |    |       |       |      |       |       |       |           |
|-----------|----|-------|-------|------|-------|-------|-------|-----------|
| SC-B4F36N | 36 | 1.380 | 0.870 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 447.77 |
| SC-B4F48  | 48 | 1.380 | 0.870 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 558.23 |
| SC-B4F48N | 48 | 1.380 | 0.870 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 561.18 |

AMP RATING WILL VARY WITH AMBIENT CONDITIONS, ORIENTATION OF THE BRAID  
AND OTHER SERVICE CONDITIONS.  
ALL SIZES ARE LISTED TO UL 467 GROUNDING AND BONDING EQUIPMENT STANDARDS

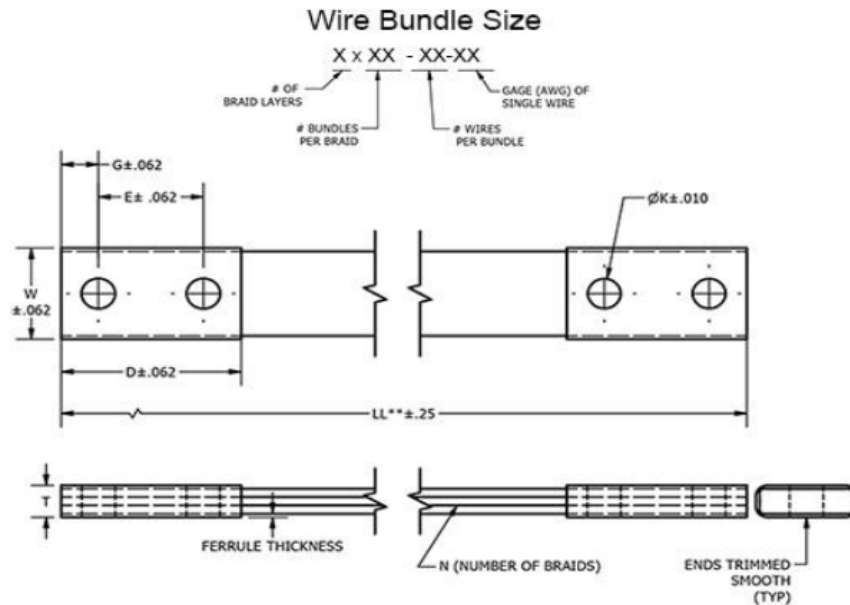

**STORM™**  
POWER COMPONENTS

1-800-394-4804

**BG Series**

## FLEXBRAID SPECIFICATIONS and PRICING

(Please see illustration below for reference)

|               |              | Pad Dimensions |            |             | Hole Diameter and Spacing |           |           |           |
|---------------|--------------|----------------|------------|-------------|---------------------------|-----------|-----------|-----------|
| Part Number   | LL<br>Length | W<br>Width     | T<br>Thick | D<br>Length | E<br>Spacing              | K<br>Dia. | G<br>Edge | Price     |
| Single Braid: |              |                |            |             |                           |           |           |           |
| 510 AMP       |              |                |            |             |                           |           |           |           |
| SC-BG12       | 12           | 1.630          | 0.364      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 115.77 |
| SC-BG12N      | 12           | 1.630          | 0.364      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 115.77 |
| SC-BG18       | 18           | 1.630          | 0.364      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 135.40 |
| SC-BG18N      | 18           | 1.630          | 0.364      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 135.40 |
| SC-BG24       | 24           | 1.630          | 0.364      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 155.03 |
| SC-BG24N      | 24           | 1.630          | 0.364      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 155.03 |
| SC-BG36       | 36           | 1.630          | 0.364      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 194.29 |
| SC-BG36N      | 36           | 1.630          | 0.364      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 194.29 |
| SC-BG48       | 48           | 1.630          | 0.364      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 233.56 |
| SC-BG48N      | 48           | 1.630          | 0.364      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 233.56 |
| Two Braids:   |              |                |            |             |                           |           |           |           |
| 875 AMP       |              |                |            |             |                           |           |           |           |
| SC-B2G12      | 12           | 1.630          | 0.500      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 175.98 |
| SC-B2G12N     | 12           | 1.630          | 0.500      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 178.93 |
| SC-B2G18      | 18           | 1.630          | 0.500      | 2.50        | 1.000                     | 0.410     | 0.750     | \$ 215.25 |
| SC-B2G18N     | 18           | 1.630          | 0.500      | 3.00        | 1.750                     | 0.560     | 0.620     | \$ 218.19 |

|                      |    |       |       |      |       |       |       |           |
|----------------------|----|-------|-------|------|-------|-------|-------|-----------|
| SC-B2G24             | 24 | 1.630 | 0.500 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 254.51 |
| SC-B2G24N            | 24 | 1.630 | 0.500 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 257.45 |
| SC-B2G36             | 36 | 1.630 | 0.500 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 333.03 |
| SC-B2G36N            | 36 | 1.630 | 0.500 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 335.99 |
| SC-B2G48             | 48 | 1.630 | 0.500 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 411.55 |
| SC-B2G48N            | 48 | 1.630 | 0.500 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 414.51 |
| <b>Three Braids:</b> |    |       |       |      |       |       |       |           |
| <b>1000 AMP</b>      |    |       |       |      |       |       |       |           |
| SC-B3G12             | 12 | 1.630 | 0.690 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 223.48 |
| SC-B3G12N            | 12 | 1.630 | 0.690 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 226.43 |
| SC-B3G18             | 18 | 1.630 | 0.690 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 282.39 |
| SC-B3G18N            | 18 | 1.630 | 0.690 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 285.32 |
| SC-B3G24             | 24 | 1.630 | 0.690 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 341.28 |
| SC-B3G24N            | 24 | 1.630 | 0.690 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 344.21 |
| SC-B3G36             | 36 | 1.630 | 0.690 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 459.06 |
| SC-B3G36N            | 36 | 1.630 | 0.690 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 462.01 |
| SC-B3G48             | 48 | 1.630 | 0.690 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 576.85 |
| SC-B3G48N            | 48 | 1.630 | 0.690 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 579.79 |
| <b>Four Braids:</b>  |    |       |       |      |       |       |       |           |
| <b>1200 AMP</b>      |    |       |       |      |       |       |       |           |
| SC-B4G12             | 12 | 1.630 | 1.000 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 275.67 |
| SC-B4G12N            | 12 | 1.630 | 1.000 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 278.62 |
| SC-B4G18             | 18 | 1.630 | 1.000 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 354.19 |
| SC-B4G18N            | 18 | 1.630 | 1.000 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 357.14 |
| SC-B4G24             | 24 | 1.630 | 1.000 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 432.72 |
| SC-B4G24N            | 24 | 1.630 | 1.000 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 435.66 |
| SC-B4G36             | 36 | 1.630 | 1.000 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 589.76 |
| SC-B4G36N            | 36 | 1.630 | 1.000 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 592.71 |
| SC-B4G48             | 48 | 1.630 | 1.000 | 2.50 | 1.000 | 0.410 | 0.750 | \$ 746.81 |
| SC-B4G48N            | 48 | 1.630 | 1.000 | 3.00 | 1.750 | 0.560 | 0.620 | \$ 749.76 |

AMP RATING WILL VARY WITH AMBIENT CONDITIONS, ORIENTATION OF THE BRAID  
AND OTHER SERVICE CONDITIONS.  
ALL SIZES ARE LISTED TO UL 467 GROUNDING AND BONDING EQUIPMENT STANDARDS



### Wire Bundle Size

